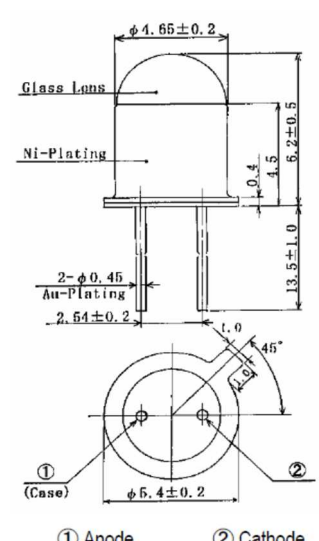


Data sheet

UV LED

EOLD-365-012

Radiation	Type	Case
Ultraviolet	GaN	Metal TO-18 package with lens

 <p style="text-align: center;">All dimensions in mm</p>	<p>Description:</p> <p>High output power Narrow beam angle High reliability</p>
	<p>Applications:</p> <p>Color sensor (money-bill) Paper sensor (money-bill) Barcode reader</p>

Maximum Ratings

T_{amb}= 25°C, unless otherwise specified



Parameter	Test Conditions	Symbol	Value	Unit
Forward current		I _F	15	mA
Pulse forward current	t = 10 μs, T = 10 ms	I _{FP}	30	mA
Reverse voltage		V _R	5	V
Reverse current	V _R = 5 V	I _R	80	mA
Power dissipation		P _D	60	mW
Operating temperature range		T _{amb}	-20 to +80	°C
Storage temperature range		T _{stg}	-30 to +100	°C
Junction temperature		T _J	100	°C
Lead soldering temperature	< 5 s, > 3 mm from the body	T _{slg}	260	°C

Optical and Electrical Characteristics

T_{amb}= 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V _F	I _F = 10 mA		3.5		V
Radiant power	Φ _e	I _F = 10 mA		1.5		mW
Peak wavelength	λ _p	I _F = 10 mA		365		nm
FWHM	Δλ _{0,5}	I _F = 10 mA		15		nm
Viewing angle	φ	I _F = 10 mA		10		deg.




Data sheet


UV LED

EOLD-365-012


FORWARD I-V CHARACTERISTICS

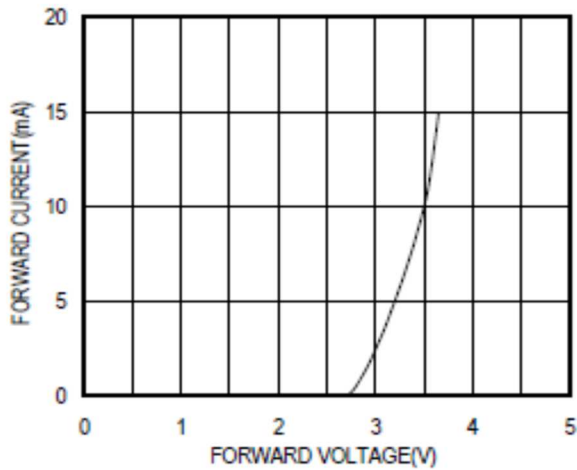


RELATIVE POWER vs FORWARD CURRENT

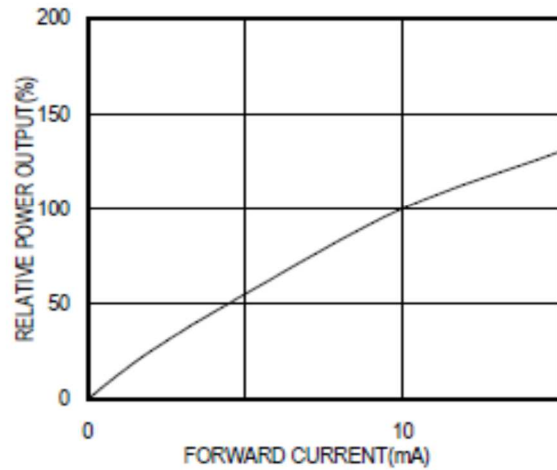

RADIATION PATTERN

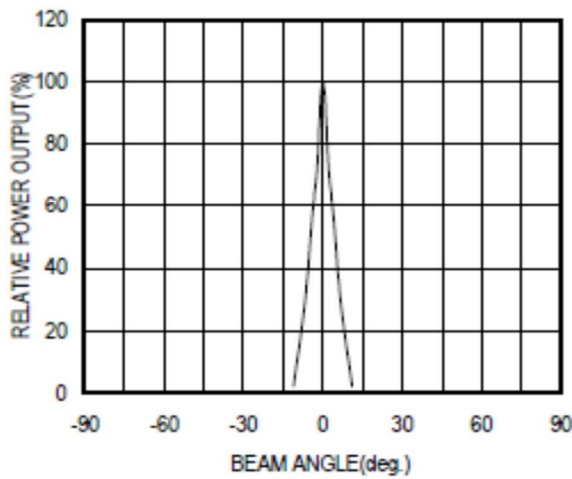

THERMAL DERATING CURVE

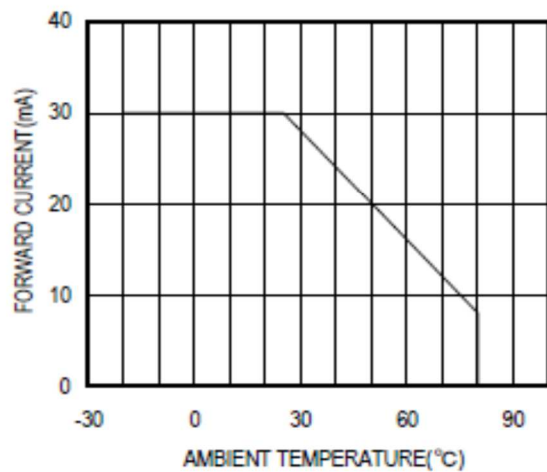

EPIGAP Optronic GmbH

Koepenicker Str. 325
D-12555 Berlin
Fon: +49 (0)30 657637 60
Fax: +49 (0)30 657637 70
sales@epigap-optronic.de




Data sheet

UV LED

EOLD-365-012

page 3 of 3
Rev. 05, 2020

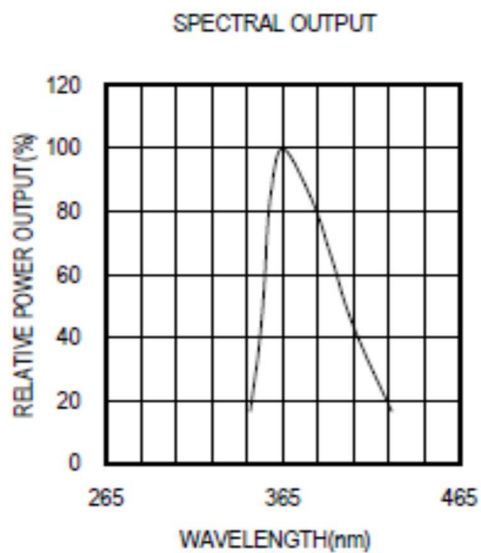

Art. No. 134 054



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.