

EPIGAP Optronik GmbH

Koepenicker Str. 325b
 D-12555 Berlin
 Fon: +49 (0)30 657637 60
 Fax: +49 (0)30 657637 70
 sales@epigap-optronic.de



Data sheet

Page 1 of 2

UV LED

EOLD-395-525-1

Rev. 04, 2017

Radiation	Type	Case
Ultraviolet	InGaN	5 mm plastic lens

Description:	
	<p>High power, high-speed, narrow beam angle, high reliability</p> <p>Dimension in mm</p>

T_{amb} = 25°C, unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Forward current		I _F	25	mA
Peak forward current	t < 0.1 ms, t/T < 1/10	I _{FM}	100	mA
Power dissipation		P _D	100	mW
Operating temperature range		T _{amb}	-30 to +80	°C
Storage temperature range		T _{stg}	-30 to +85	°C
Lead soldering temperature	< 5 s, 3 mm from case	T _{slg}	260	°C

Optical and Electrical Characteristics

T_{amb} = 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V _F	I _F = 20 mA	3	3.2	4.2	V
Radiant power	Φ _e	I _F = 20 mA	18		22	mW
Peak wavelength	λ _p	I _F = 20 mA	390	395	400	nm
FWHM	Δλ _{0,5}	I _F = 20 mA		15		nm
Viewing angle	φ	I _F = 20 mA		25		deg.



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

EPIGAP Optronik GmbH

Koepenicker Str. 325b
D-12555 Berlin
Fon: +49 (0)30 657637 60
Fax: +49 (0)30 657637 70
sales@epigap-optronic.de




Data sheet

Page 2 of 2

UV LED

EOLD-395-525-1

Rev. 04, 2017

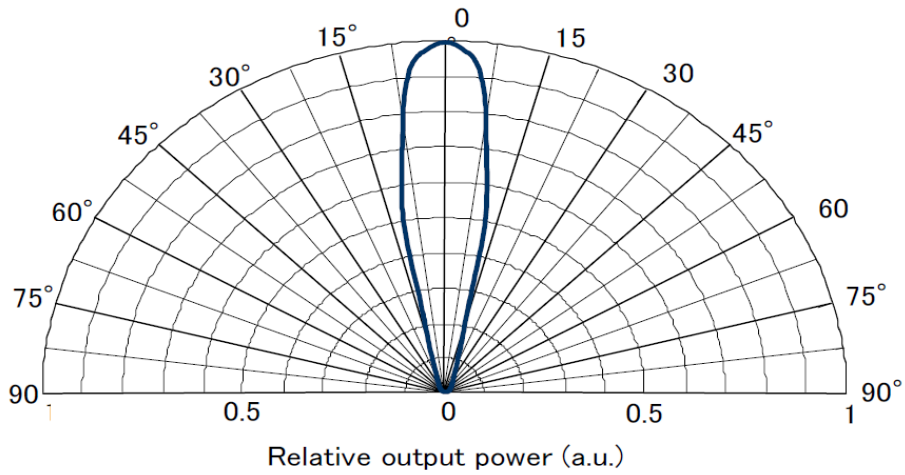

Radiation pattern

Art. No. 132 016



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.